


Luxura® 6030 Skirted Bath Technical Specifications

Letter	Description	Soaker	Whirlpool	Each component requires a separate, dedicated GFCI protected circuit
-	Drain Location	LH/RH Drain		
-	Pump/Blower Location	LH/RH Pump		GFCI Outlet (60Hz)
-	Cutout Template	N/A		
-	Drop-in Cutout Dimensions (L x W)	N/A		Soaker Only
-	Total Weight	662 lbs (300 kg)	687 lbs (311 kg)	
-	Floor Loading	53lb/ft ² (258 kg/m ²)	55lb/ft ² (268 kg/m ²)	Whirlpool Model
-	Operating Gallons (Max)	47 gal (177 L)		
-	Product Weight - Empty	70 lbs (32 kg)	95 lbs (43 kg)	Heater
-	Soaking Depth	16" (406 mm)		
L	Outer Length	60" (1524 mm)		120V/15A
W	Outer Width	30" (762 mm)		
H	Overall Height	20.25" (514 mm)		
A	Overflow Height	16.75" (424 mm)		
B	Long Edge to Drain Center	9.25" (235 mm)		
C	Short Edge to Drain Center	15" (381 mm)		
D	Drain Shoe Length	5.875" (149 mm)		
E	Tile Flange Height	1" (25 mm)		
F	Deck Width	3.6" (91 mm)		
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)		
I	Floor Cutout for Drain	12" x 6" (305 mm x 152 mm)		
J	Interior Dimensions (JW x JL) Bottom of Bath	45" x 18.5" (305 mm x 457 mm)		
K	Interior Dimensions (KW x KL) Top of Bath	53.5" x 21.5" (1359 mm x 546 mm)		
L2	Interior Depth - Drain End (D)	19" (483 mm)		
M	Backrest Angle	26°		

Key Dimensions

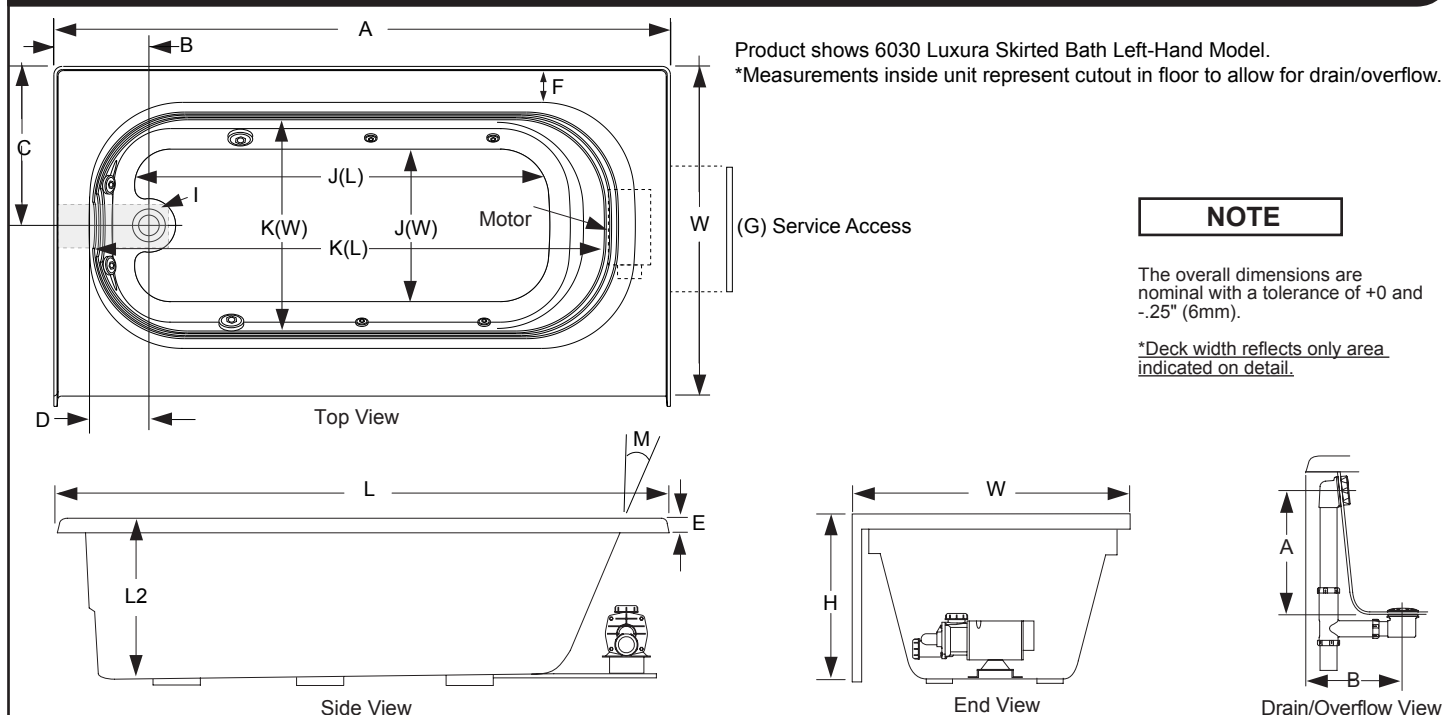

©2017 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/baths/
Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.
PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.